



**3 Pad Type**

## Features:

Vertical Height : **1.25mm**

Signal Contact Deep-Drawing Press Mold

High Frequency Performance (V.S.W.R.)




a. 1.30max. ( DC ~ 3GHz )

b. 1.40max. ( 3 ~ 6GHz )

c. 1.50max. ( 6 ~ 11GHz ) **special type**





RoHS II Compliant

| HMT P/N       | PACKING                             |
|---------------|-------------------------------------|
| MRFR1-0000310 | 5,000PCS/REEL;<br>50,000PCS/CARTON. |

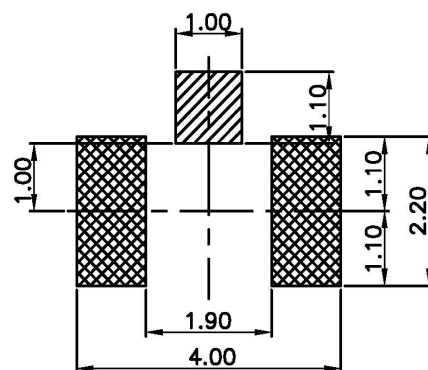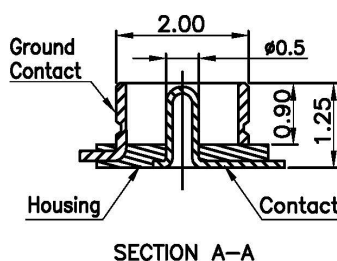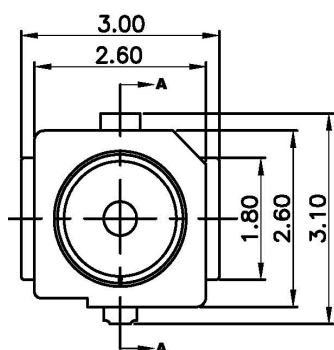

**RECOMMENDED PCB LAYOUT**  
(TOLERANCE:±0.05)

▨ Contact ▩ Ground Contact

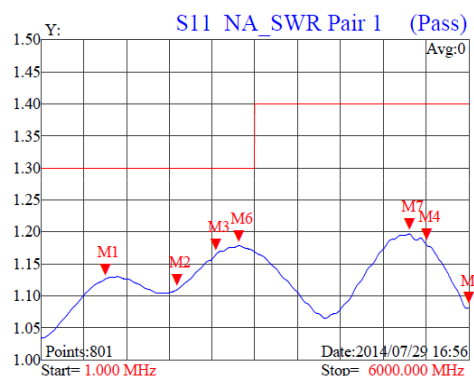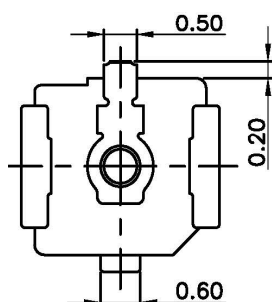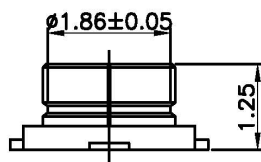

## SALES OFFICES

### Headquarters & Intl'Sales Office

Harumoto Technology(ShenZhen)Co.,Ltd

No.4 The Sixth Industrial Park Mashantou Village,Gongming Town, Guangming New Zone, Shenzhen, China

Tel : +86-755-2771-0581 ext 203

Cell Phone : +86-135-1098-7717

E-mail : fae@harumoto.com service@harumoto.com salesassistant@harumoto.com

Web Site : [www.harumoto.com](http://www.harumoto.com)