




PCI Express M.2 Specification

Features:

Vertical Height : **0.60mm**

Signal Contact Deep-Drawing Press Mold

High Frequency Performance (V.S.W.R.)



a. 1.30max. (DC ~ 3GHz)

b. 1.40max. (3 ~ 6GHz)


c. 1.50max. (6 ~ 11GHz) **special type**

RoHS II Compliant

HMT P/N	PACKING
MRFR4-0020320	15,000PCS/REEL; 150,000PCS/CARTON.

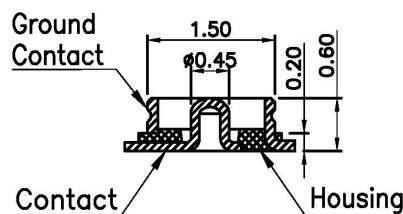
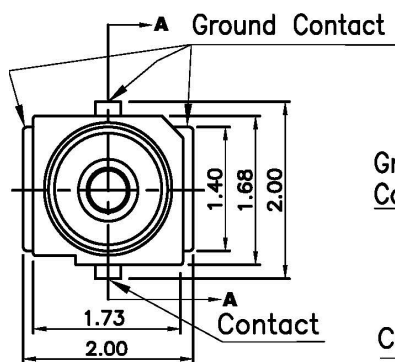


SECTION A-A

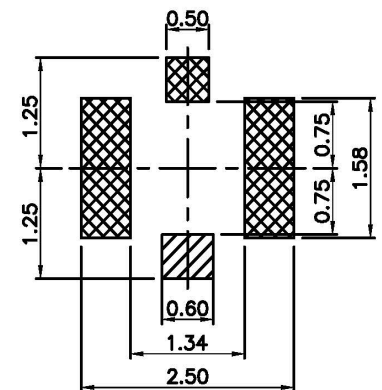


RECOMMENDED PCB LAYOUT
(TOLERANCE:±0.05)

▨ Contact ▨ Ground Contact

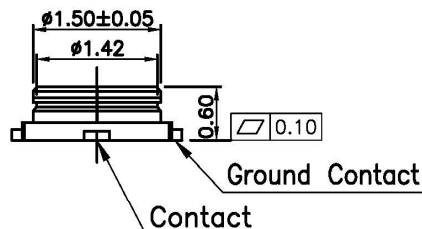

S11 NA_SWR Pair 2 (Pass)

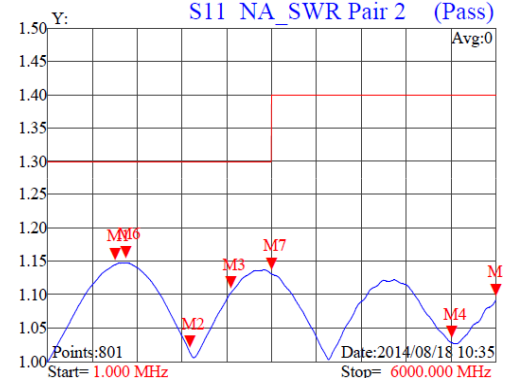

SALES OFFICES

Headquarters & Intl'Sales Office

Harumoto Technology(ShenZhen)Co.,Ltd

No.4 The Sixth Industrial Park Mashantou Village,Gongming Town, Guangming New Zone, Shenzhen, China

Tel : +86-755-2771-0581 ext 203

Cell Phone : +86-135-1098-7717

E-mail : fae@harumoto.com service@harumoto.com salesassistant@harumoto.com

Web Site : www.harumoto.com