



OD 0.50 / 0.64 / 0.81mm

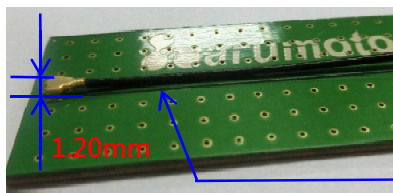

OD 0.64 / 0.81 / 0.95 / 1.13mm

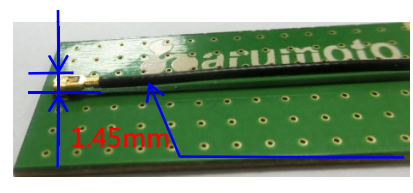

OD 0.95 / 1.13 / 1.32 / 1.37mm

OD 1.13 / 1.32 / 1.37 mm Cable



OD 0.81 / 0.95 / 1.13 mm Cable







OD 0.50 / 0.64 / 0.81mm Cable



MRF 4 (Type IV Receptacle Connector)

MRF 4 Specification :

Mating Height	0.95mm	1.20mm	1.45mm
Mating State			
Cables Size (mm)	OD0.50 / 0.64 / 0.81	0.64 / 0.81 / 0.95 / 1.13	0.95 / 1.13 / 1.32 / 1.37
Receptacle Connector	 MRF 4 Receptacle Connector (PCI Express M.2 Specification)		

Features:

- Low Profile (mating height)
 - 0.95mm : OD0.50 / 0.64 / 0.81mm cables
 - 1.20mm : OD0.64 / 0.81 / 0.95 / 1.13mm cables
 - 1.45mm : OD0.95 / 1.13 / 1.32 / 1.37mm cables
- The wide use Class Coaxial Connector
Receptacle Connector fit PCI Express M2.0
- High Frequency Performance (V.S.W.R.)
 - 1.30max. (DC ~ 3GHz)
 - 1.40max. (3 ~ 6GHz)
 - 1.50max. (6 ~ 15GHz) **special type**
- RoHS compliant, Halogen-free product
Lead-free : 50ppm max.
Halogen-free : 300ppm max. **special type**
(F + Cl + Br + I total amount)

SALES OFFICES

Headquarters & Intl'Sales Office

Harumoto Technology(ShenZhen)Co.,Ltd


No.4 The Sixth Industrial Park Mashantou Village,Gongming Town, Guangming New Zone, Shenzhen, China

Tel : +86-755-2771-0581 ext 203

Cell Phone : +86-135-1098-7717

E-mail : fae@harumoto.com service@harumoto.com salesassistant@harumoto.com

Web Site : www.harumoto.com

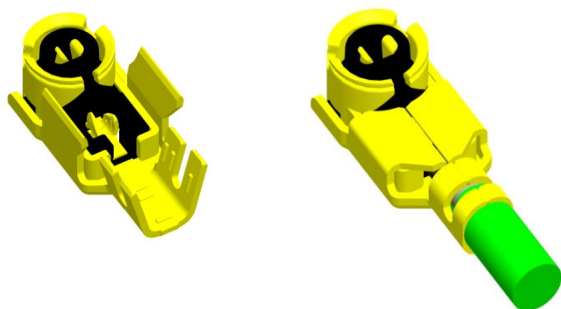

Features:

Mating Height : **0.95mm**¹


Industry Standard Product

Supports OD 0.50 / 0.64 / 0.81mm Cable



High-Frequency Option Available²

RoHS II Compliant

Halogen Free³

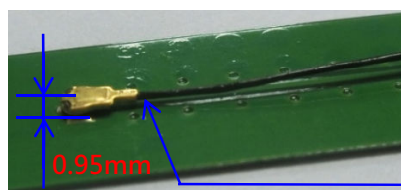

OD 0.50 / 0.64 / 0.81mm

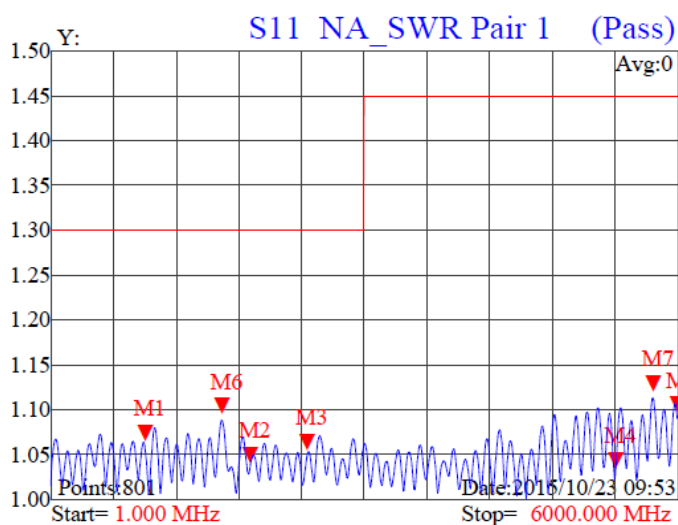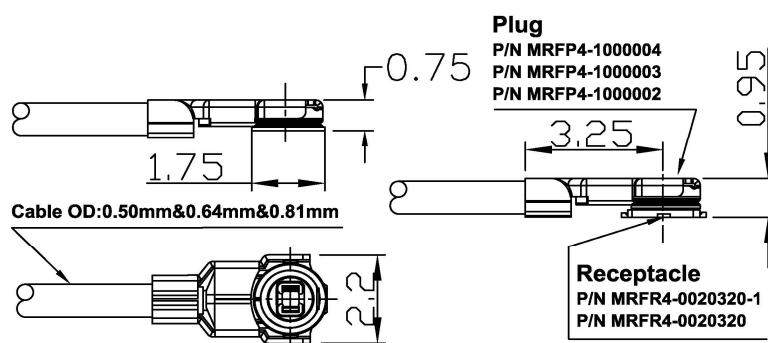

1.) Harumoto Unique

2.) DC~6GHz, VSWR < 1.5 (Industry Standard)
DC~15GHz, VSWR < 1.5 (Available for Special Order)

3.) Cl + Br (halogen) 1,500 PPM (Industry Standard)
F + Cl + Br + I (Halogen Family, 300 PPM Available for Special Order)

SALES OFFICES

Headquarters & Intl'Sales Office

Harumoto Technology(ShenZhen)Co.,Ltd


No.4 The Sixth Industrial Park Mashantou Village,Gongming Town, Guangming New Zone, Shenzhen, China

Tel : +86-755-2771-0581 ext 203

Cell Phone : +86-135-1098-7717

E-mail : fae@harumoto.com service@harumoto.com salesassistant@harumoto.com

Web Site : www.harumoto.com

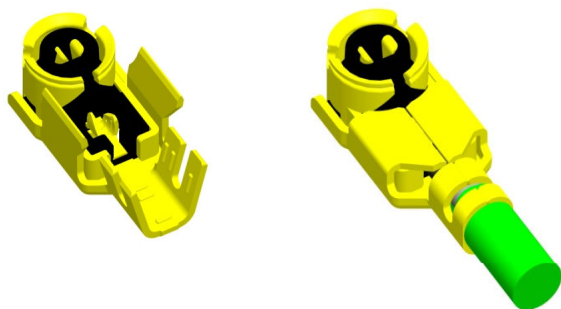

Features:

Mating Height : **1.20mm**


Industry Standard Product

Supports OD 0.64 / 0.81 / 0.95¹ / 1.13¹ mm Cable



High-Frequency Option Available²

RoHS II Compliant

Halogen Free³

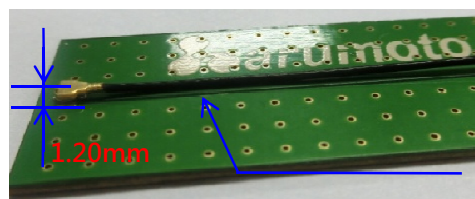

OD 0.64 / 0.81 / 0.95 / 1.13mm

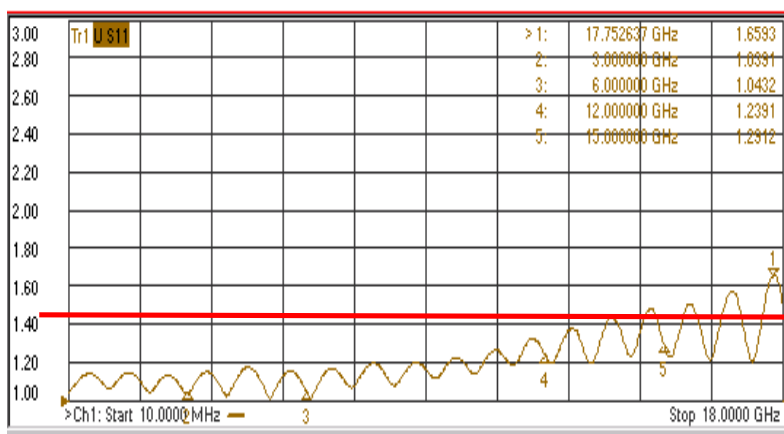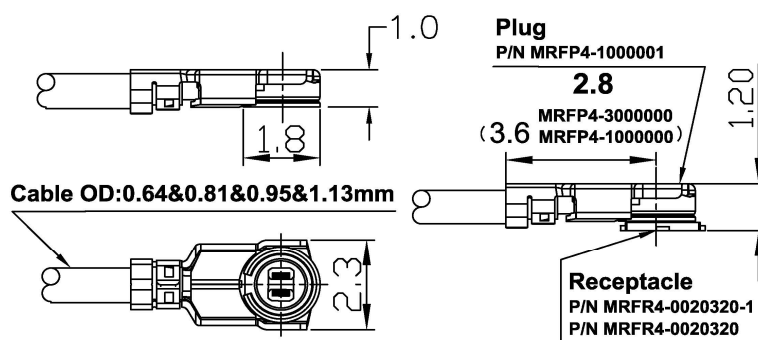

1.) Harumoto Unique

2.) DC~6GHz, VSWR < 1.5 (Industry Standard)
DC~15GHz, VSWR < 1.5 (Available for Special Order)

3.) Cl + Br (halogen) 1,500 PPM (Industry Standard)
F + Cl + Br + I (Halogen Family, 300 PPM Available for Special Order)

SALES OFFICES

Headquarters & Intl'Sales Office

Harumoto Technology(ShenZhen)Co.,Ltd


No.4 The Sixth Industrial Park Mashantou Village,Gongming Town, Guangming New Zone, Shenzhen, China

Tel : +86-755-2771-0581 ext 203

Cell Phone : +86-135-1098-7717

E-mail : fae@harumoto.com service@harumoto.com salesassistant@harumoto.com

Web Site : www.harumoto.com

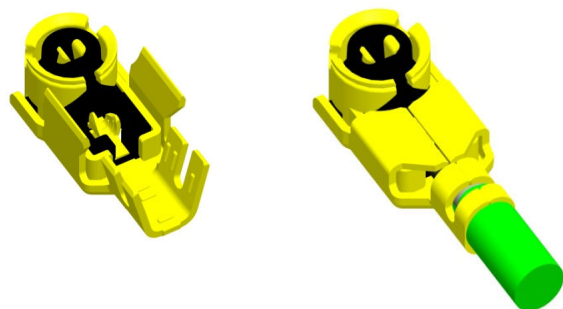

Features:

Mating Height : **1.45mm**


Industry Standard Product

Supports OD 0.95 / 1.13 / 1.32¹ / 1.37¹ mm Cable



High-Frequency Option Available²

RoHS II Compliant

Halogen Free³

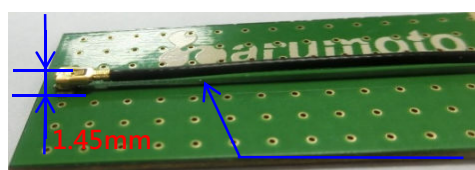

OD 0.95 / 1.13 / 1.32 / 1.37mm

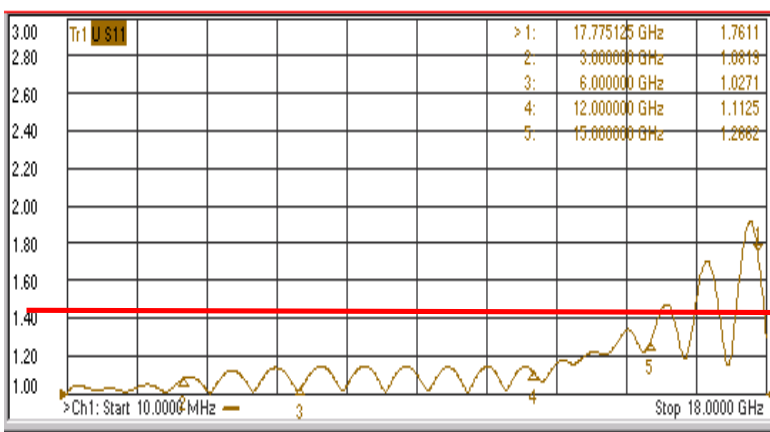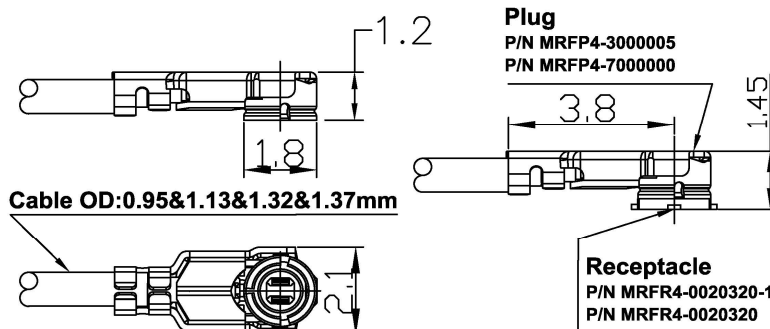

1.) Harumoto Unique

2.) DC~6GHz, VSWR < 1.5 (Industry Standard)
DC~15GHz, VSWR < 1.5 (Available for Special Order)

3.) Cl + Br (halogen) 1,500 PPM (Industry Standard)
F + Cl + Br + I (Halogen Family, 300 PPM Available for Special Order)

SALES OFFICES

Headquarters & Intl'Sales Office

Harumoto Technology(ShenZhen)Co.,Ltd

No.4 The Sixth Industrial Park Mashantou Village,Gongming Town, Guangming New Zone, Shenzhen, China

Tel : +86-755-2771-0581 ext 203

Cell Phone : +86-135-1098-7717

E-mail : fae@harumoto.com service@harumoto.com salesassistant@harumoto.com

Web Site : www.harumoto.com