


A. Features :

Impedances	: 50 Ω
Frequency	: DC~6, 9, 12, 15, 18GHz for Option
VSWR	: 1.5 Max.
Coaxial cable (OD.)	a. OD. 1.13mm b. OD. 1.37mm c. Customized
Length	: Customized
Quantity	: 1 piece Min. for sale

B. Applications :


- Communication Infrastructure
- MIMO Ultra High Speed Outdoor Return Fixed and Mobile Wireless Access Points
- Satellite Communications
- Military Aerospace
- Testing and Measurement Instruments

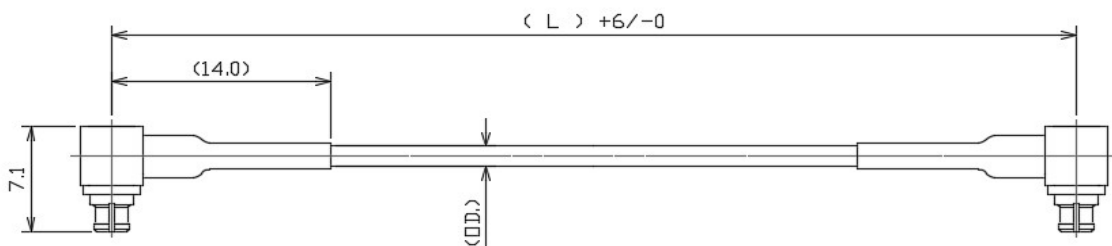

C. Performance :

SMPP R/A Plug to SMPP R/A Plug with OD.1.37 Cable, L= 42cm @15GHz

Insertion Loss:

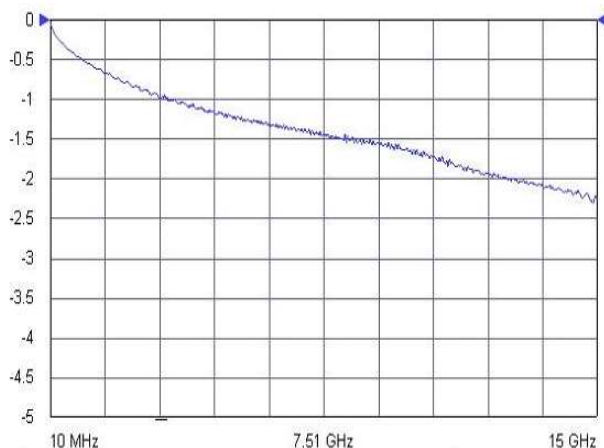

VSWR :

