


#### A. Features :

|                     |                                                 |
|---------------------|-------------------------------------------------|
| Impedances          | : 50Ω                                           |
| Frequency           | : DC~6, 9, 12, 15, 18GHz for Option             |
| VSWR                | : 1.5 Max.                                      |
| Coaxial cable (OD.) | a. OD. 1.13mm<br>b. OD. 1.37mm<br>c. Customized |
| Length              | : Customized                                    |
| Quantity            | : 1 piece Min. for sale                         |

#### B. Applications :


- Communication Infrastructure
- MIMO Ultra High Speed Outdoor Return Fixed and Mobile Wireless Access Points
- Satellite Communications
- Military Aerospace
- Testing and Measurement Instruments

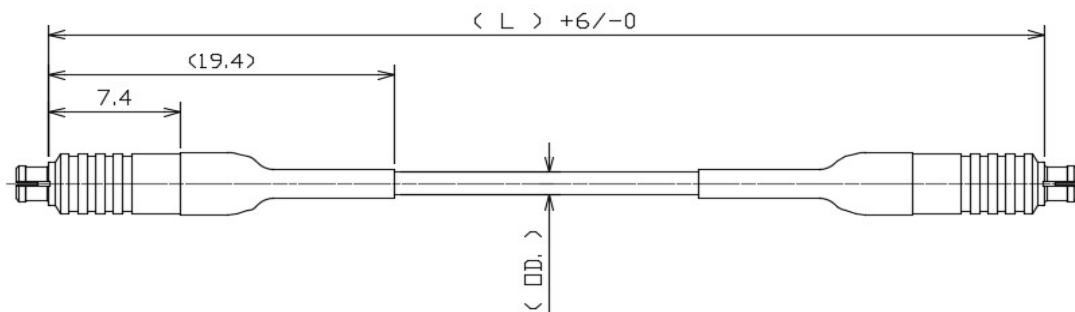

#### C. Performance :

**SMPM ST Plug to SMPM ST Plug with OD.1.37 Cable, L= 42cm @12GHz**

**Insertion Loss:**

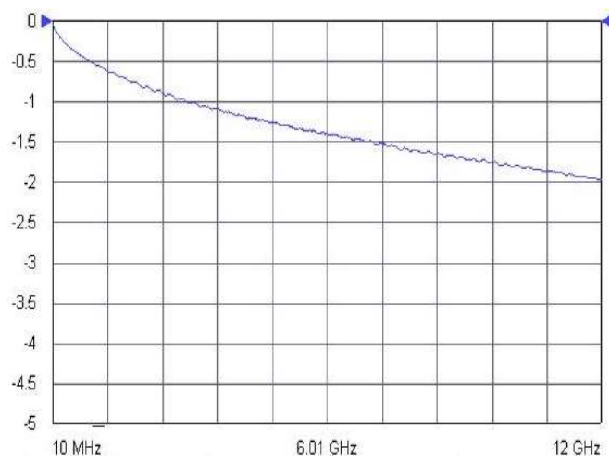

**VSWR :**

